


XTRA POWER LiFePO4

RW-M6.1

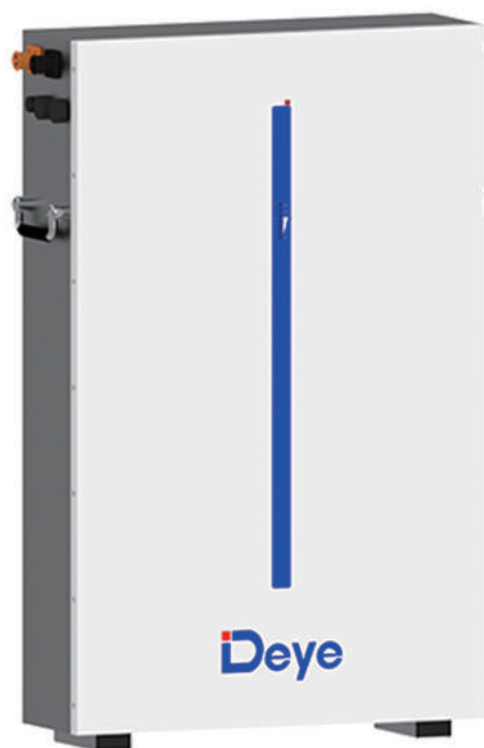

- ◆ **Safer:**
Cobalt Free Lithium Iron Phosphate (LFP) Battery: Safety and long Lifespan, high efficiency and high-Power density. Intelligent BMS, providing complete protection.
- ◆ **Reliable:**
Support high discharge power. IP65, natural cooling, wide temperature range: -20°C to 55°C.
- ◆ **Flexible:**
Modular design, easy to expand, Max. 32 units in parallel, Max. capacity of 195kWh. Suited to residential and commercial applications for increasing the self-consumption ratio.
- ◆ **Convenient:**
Battery module auto networking, Automatic IP addressing, Easy maintenance, remotely monitoring and upgrade, Support USB drive upgrade the firmware.
- ◆ **Eco-Friendly:**
Use environmental protection materials, the whole module non-toxic, pollution-free.
- ◆ **Wall-Mounted:**
High-power density:
Flat design, wall-mounted, saving installation space.

Technical Data

Model		RW-M6.1
Main Parameter		
Battery Chemistry	LiFePO4	
Capacity (Ah)	120	
Scalability (max. in 1 battery group)	Max.32 in Parallel(195kWh)	
Nominal Voltage (V)	51.2	
Operating Voltage(V)	43.2~57.6	
Energy (kWh)	6.1	
Usable Energy (kWh) ^[1]	5.5	
Charge/Discharge Current (A)	Recommend ^[2]	60
	Max ^[2]	100
	Peak (2 minutes,25°C)	150
Other Parameter		
Recommend Depth of Discharge	90%	
Dimension (W/H/D,mm)	485×790×160	
Weight Approximate (kg)	55	
Master LED Indicator	5LED(SOC:20%~100%), 3LED (working, alarming, protecting)	
IP Rating of Enclosure	IP65	
Working Temperature (°C)	Charge:0~55/Discharge:-20~55	
Storage Temperature	0°C ~ 35°C	
Humidity	5%~95%	
Altitude	≤2000m	
Cycle Life	25°C±2°C, 0.5C/0.5C,70%EOL≥6000	
Installation	Wall-Mounted, Floor-Mounted	
Communication Port	CAN2.0, RS485	
Warranty	10 years	
Life Cycle Power During Warranty Period ^[3]	20MWh@70%EOL	
Certification	UL1973, FCC, IEC62619, CE, UN38.3	

[1] DC Usable Energy, test conditions: 90% DOD, 0.5C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.

[2] The current is affected by temperature and SOC.

[3] The warranty is due whichever reached first of warranty period or life cycle power.

Introduction

This series is especially suitable for application scene of high power, limited installation space, restricted load-bearing and long cycle life.

This series has built-in BMS battery management system, which can manage and monitor cells information including voltage, current and temperature. What's more, BMS can balance cells charging and discharging to extend cycle life.

Multiple batteries can connect in parallel to expand capacity and power in parallel for larger capacity and longer power supporting duration requirements.